

UNDERCOUNTER FREEZERS

MODEL: MXCF27UHC MXCF48UHC MXCF60UHC MXCF72UHC



MXCF27UHC



MXCF48UHC



MXCF60UHC



MXCF72UHC


Maxx Cold stainless steel Undercounter Freezers are designed to provide the user with maximum storage, energy savings and cold, accurate temperatures. Our undercounter models allow for easy accessibility, optimum capacity and flexibility for quick and efficient food preparation.

FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior
- Painted aluminum interior
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters
- Solid state digital control system
- LED temperature display
- Automatic defrost system
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane insulated walls and doors
- Accommodates full-size sheet pans

ELECTRIC

115V / 60Hz / 1Ph
 (230V / 50-60Hz / 1Ph is available as an option)
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential



DOE 2018 Compliant

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797


NET STORAGE CAPACITY

MXCF27UHC	6.5 Cu Ft (184 L)
MXCF48UHC	12 Cu Ft (340 L)
MXCF60UHC	15.5 Cu Ft (439 L)
MXCF72UHC	18 Cu Ft (510 L)

TEMPERATURE

Holding temperature -4°F to 10°F (-20°C to -12°C)

- Efficient forced-air refrigeration system

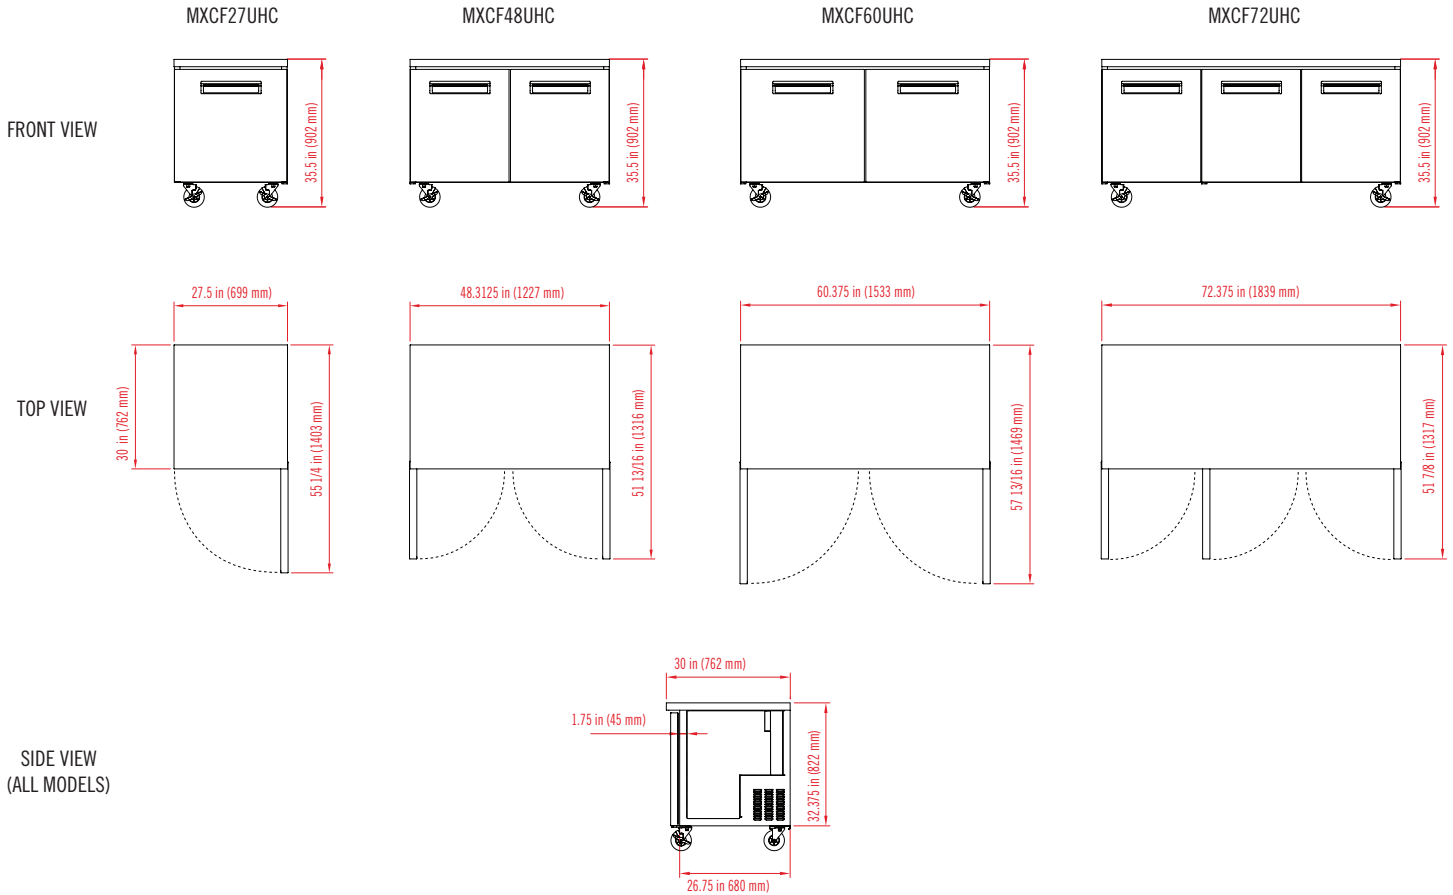

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MXCF27UHC	27.5" x 30" x 35.5" (699 x 762 x 911 mm)	22.9" x 18.8" x 24.5" (602 x 478 x 622 mm)	6.5 Cu Ft (184 L)	-4°F to 10°F (-20°C to -12°C)	1.9A	224 lbs (102 kg)	R-290a 3.35 oz (95 g)	1 / 1	115V / 60Hz / 1Ph
MXCF48UHC	48.3125" x 30" x 35.5" (1227 x 762 x 911 mm)	43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm)	12 Cu Ft (340 L)	-4°F to 10°F (-20°C to -12°C)	4.0A	310 lbs (141 kg)	R-290a 3.53 oz (100 g)	2 / 2	115V / 60Hz / 1Ph
MXCF60UHC	60.375" x 30" x 35.5" (1533 x 762 x 911 mm)	56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm)	15.5 Cu Ft (439 L)	-4°F to 10°F (-20°C to -12°C)	5.0A	362 lbs (166 kg)	R-290a 3.53 oz (100 g)	2 / 2	115V / 60Hz / 1Ph
MXCF72UHC	72.375" x 30" x 35.5" (1839 x 762 x 911 mm)	66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm)	18 Cu Ft (510 L)	-4°F to 10°F (-20°C to -12°C)	6.0A	442 lbs (203 kg)	R-290a 3.88 oz (110 g)	3 / 3	115V / 60Hz / 1Ph

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements